

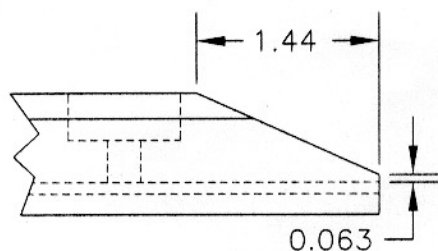
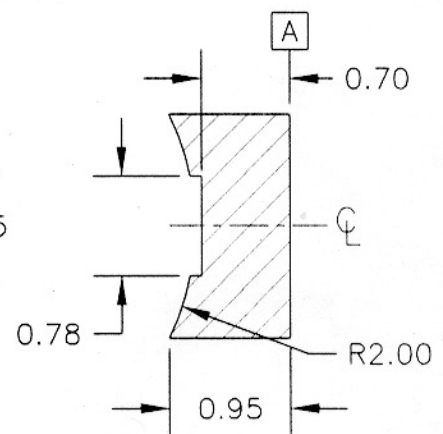
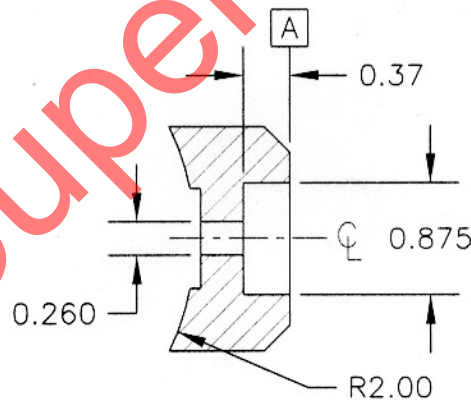
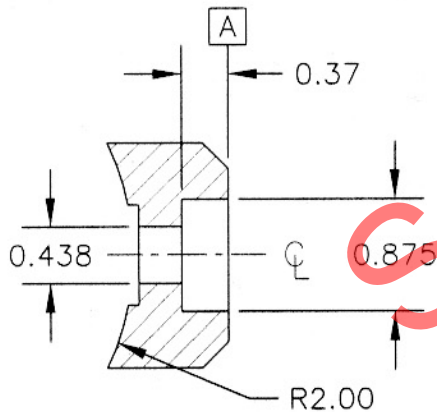
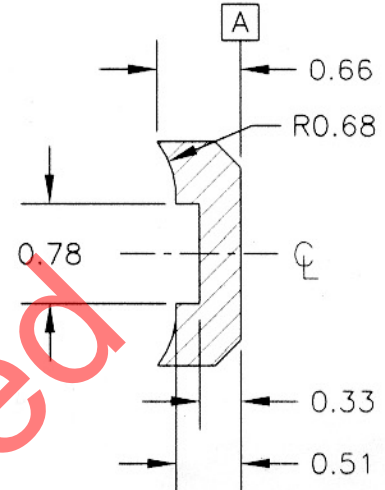





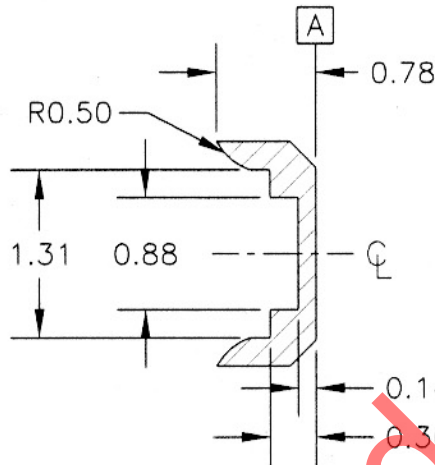


DESIGN #	DRAWN BY CP	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
CHECKED #	APPROVED #	DRAWING NO. D2916	REV. B SHEET 1 OF 2
DATE 00.02.24		TITLE CABLE GUARD	SCALE 1:6
A	99.09.29	NEW ISSUE	
B	00.02.24	ADD K-K FOR D2521 COMPATIBILITY	

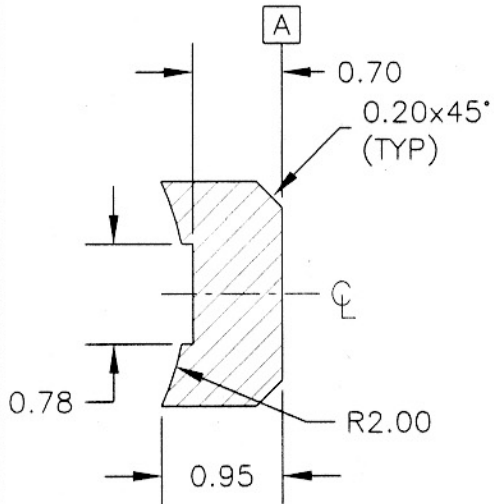

DETAIL J
(SCALE 2:3)

RELEASED
00.02.25 DS

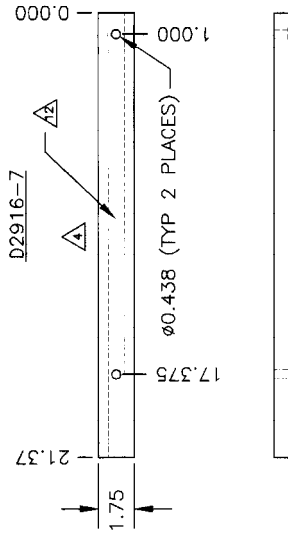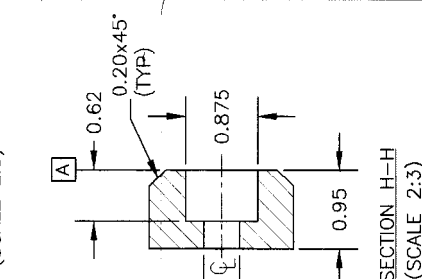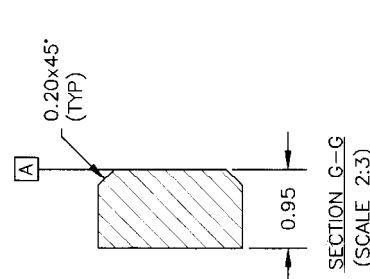

NOTES:

- 1) MACHINE CONSTANT SECTION A-A
- 2) MACHINE CONSTANT SECTION B-B
- 3) MACHINE CONSTANT SECTION C-C
- 4) MACHINE CONSTANT SECTION F-F
- 5) MACHINE CONSTANT SECTION G-G
- 6) 25° ANGLE OF TRANSITION BETWEEN SECTIONS WITH MIN RADIUS OF 0.50
- 7) 50° ANGLE OF TRANSITION BETWEEN SECTIONS WITH MIN RADIUS OF 0.50
- 8) MACHINE SLOT PER SECTION K-K WITH 0.063 RADIUS OF TRANSITION BETWEEN SECTIONS
- 9) MATERIAL: UHMW BLACK PER SPEC CONTROL DWG D2689
- 10) BREAK ALL UNMARKED RADII 0.020 TO 0.040
- 11) ENGRAVE TWO DART LOGOS (OPPOSITE AS SHOWN) ON UPPER SIDE TO MAX DEPTH OF 0.015 AND MIN RADIUS OF 0.250.
- 12) ENGRAVE P/N ON LOWER SIDE TO MAX DEPTH OF 0.010 AND MIN RADIUS OF 0.010.
- 13) ALL HOLES DRILLED ON CENTERLINES
- 14) TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED
- 15) ALL DIMENSIONS ARE IN INCHES

RELEASED
00.02.24

DESIGN	DRAWN BY	DART AEROSPACE LTD
CHECKED	APPROVED	DRAWING NO. D2916
DATE	TITLE	CABLE GUARD
00.02.24		SCALE 1:6

